

ESSENCE

elvial

W67ST HI²






OPENING SYSTEM

The astragal bars on this profile are an additional design element that offers versatility and depth to your aesthetic approach. The features and technologies will offer comfort and satisfaction to the users of your project. ELVIAL happily guarantees all.

ESSENCE

W67ST HI²

This solution combines great technologies and our unparalleled sense of design to help you create an aesthetically pleasing and pleasant space for all its users.

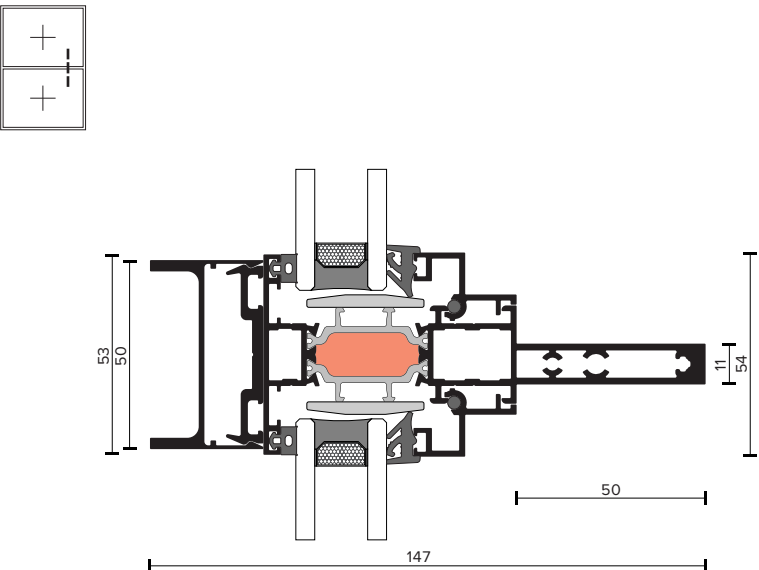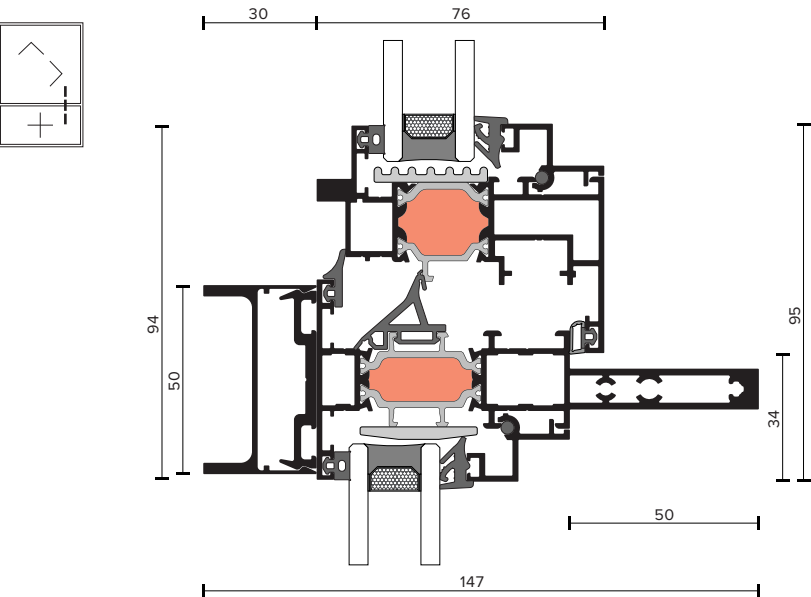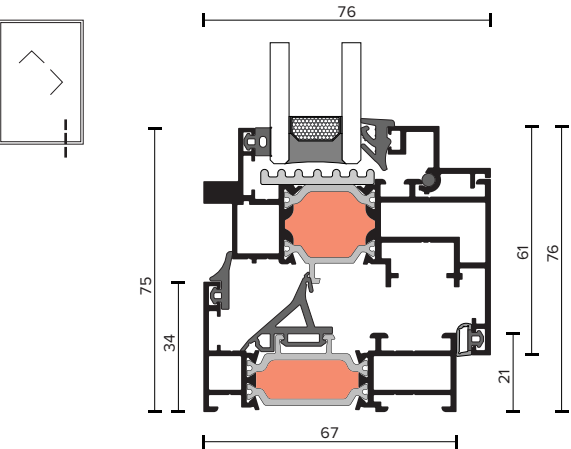

INWARD OPENING CONSTRUCTIONS

	Single sash fixed		Double sash fixed
	Single sash fixed with skylight		Double sash opening
	Single sash opening		Double sash titl & turn
	Single sash tilt & turn		
	Single sash titl & turn with fixed part		

OUTWARD OPENING CONSTRUCTIONS

	Single sash opening window door		
	Double sash opening window door		
	Single sash opening window door with fixed		
	Single sash projected		
	Special typology window wall		

TECHNOLOGY

THERMAL INSULATION

- 1 **32mm** Insulating Bars in frame and **24mm** in sash Glass Fiber re-enforcement **25%**
- 2 **ELVIAL I²** _ Innovative Insulation Technology
- 3 **Co-Extruded** Gasket
- 4 Foam **Insulating** Profile

SEALING SYSTEM

- 1 Optimal 3-level Waterproofing with specially designed **EPDM** and Co-extruded Gaskets
- 2 **EPDM** Gasket Corners
- 3 **EPDM** End Caps for **Adjoining Profile**

INNOVATION

- 1 **Ghost Glazing Gaskets** Minimizes the visible facet and renders the gaskets practically invisible

EXTRA FEATURES

HANDLES FOR UNIQUE STYLE



COLORS



ENERGY LEVELS




Level **1**
*Uf: **≥2.26** W/m²K

*Energy performances concern the specific sash-frame combination



Level **2**
*Uf: **≥1.88** W/m²K



Level **3**
*Uf: **≥1.77** W/m²K

IDENTITY

DESIGN

PROPERTIES

PERFORMANCE

ENERGY

COMFORT

Frame Depth		67	mm
Min Face Height Frame - Sash		75	mm
Min Face Height Threshold - Sash		-	
Min Face Height Middle Mullion		113	mm
Max Sash Height		2.400	mm
Max Sash Width		1.200	mm
Max Sash Weight		150	kg
Max Glass Thickness		46	mm

ESSENCE W67ST HI² offers you endless solutions in both European groove mechanism **[CE]** and Multilock groove mechanism **[ML]**

Thermal Insulation Uf	EN ISO 10077-2	≥1.4 W/m²K
Air Permeability	EN 12207	Class 4 [600Pa]
Watertightness	EN 12208	E900 [900Pa]
Resistance to Wind Load	EN 12210	C5 / B5 [2.000Pa]

SEE LIFE FROM A DIFFERENT
VIEW THROUGH ELVIAL'S
ALUMINIUM SYSTEMS

**DISCOVER OUR INNOVATIVE
TECHNOLOGIES**

ELVIAL I² INSULATION TECHNOLOGY
ELVIAL PRE-ANODIZING 2IN1

**DISCOVER MORE ALUMINIUM
SYSTEMS**

ICONIC W77 AI²
ICONIC W77BS AI²
ICONIC W77ST AI²

ESSENCE W67 HI²
ESSENCE W67BS HI²

ELVIAL W59 SI²
ELVIAL W60BS SI²

ESSENCE SL60 HI²
ESSENCE SL60 HI² FLAT EDITION
ELVIAL SL60 HI² CLASSIC
ESSENCE SL50 HI² FLAT EDITION
ELVIAL SL50 HI² CLASSIC

ELVIAL SL46 SI² CLASSIC
ELVIAL SL46 SI² FLAT EDITION
ELVIAL SL46 SI²_MD

ICONIC D77 AI²
ESSENCE D67 HI²

ESSENCE SD55
ESSENCE CLADDING CL180